

## Programmable Attenuator PAH-6G/95-TTL

MTS-No.: 25364

### Description

The PAH-6G/95-TTL from MTS Systemtechnik is designed for operations between 50 MHz and 6000 MHz. The attenuation of this unit is adjustable, continuously and without breaks from 0 to 95 dB in 0.25 / 0.5 dB steps. The interchangeable in- and output ports are protected by internal blocking capacitors.

This attenuator can be used very flexible because of its compact design and the controlling via TTL interface (8 bit parallel).



### Technical data:

#### 1 RF-specifications:

1.1 Impedance	50 Ω		
1.2 Input power			
- Absolute <sup>1</sup>	34 dBm max.		
- Operating: Pulsed <sup>2</sup>	31 dBm max.		
- Operating: CW	28 dBm max.		
1.3 Voltage rating	50 WVDC		
1.4 Frequency range	50 - 6000 MHz		
1.5 Attenuation	0 - 32 dB in 0.25 dB steps 32 - 95 dB in 0.5 dB steps		
	<b>min.</b>	<b>typ.</b>	<b>max.</b>
1.6 VSWR in / out			
@ 50 - 700 MHz			
@ 0 - 5 dB		1.45	1.8
@ 5.25 - 95 dB		1.15	1.6
@ 700 - 6000 MHz			
@ 0 - 5 dB		1.25	1.65
@ 5.25 - 95 dB		1.1	1.5
1.7 Insertion loss (IL)			
@ 50 MHz		2.8 dB	3.1 dB
@ 6000 MHz		7.5 dB	8.5 dB
1.8 IL derating / 20 MHz		0.015 dB	0.03 dB
1.9 Relative phase			
@ 0 - 95 dB		165°	
1.10 Input IP3		55 dBm	
1.11 Switching speed		1 μs	
1.12 Attenuation accuracy (negative means more attenuation)			
@ 50 - 3000 MHz			
@ 0.25 - 30 dB		±0.1 dB	±0.8 dB
@ 30.25 - 60 dB		±0.4 dB	+1.5/-0.8 dB
@ 60.5 - 95 dB		±0.8 dB	+2.5/-1.5 dB
@ 3000 - 6000 MHz			
@ 0.25 - 30 dB		0/-0.7 dB	+0.8/-1.5 dB
@ 30.25 - 60 dB		0/-2.6 dB	+0.8/-3.0 dB
@ 60.5 - 85 dB		0/-4.0 dB	+1.5/-6.0 dB
@ 85.5 - 95 dB		0/-5.2 dB	+1.5/-9.0 dB

#### 2 Connections:

2.1 RF connectors	SMA female
2.2 Control connector	12pole male, type SMC Erni

#### 3 General specifications:

3.1 Internal voltage (TTL)	5 VDC ±5 %
3.2 Power consumption	5 mW max.
3.3 Control	8 bit parallel (TTL)
3.4 Operating temperature	-40 °C - +85 °C
3.5 Storage temperature	-55 °C - +150 °C
3.6 Reference temperature of specifications (typ.)	+25 °C
3.7 Dimensions (without connections) (LxWxH)	56.4 mm x 48.7 mm x 11 mm
3.8 Case style	Milled aluminium enclosure
3.9 Colour	SurTec650 (Chrome alloy)
3.10 Weight	55 grams

#### 4 Delivered parts:

PAH-6G/95-TTL  
 Datasheet  
 Drawing and connector pin assignment

#### 5 Comments:

Warranty 12 months  
 RoHS-compliant Yes

#### 6 Recommended accessories:


RF-cables  
 Processor card

Notes: 1. Exceeding absolute maximum ratings may cause permanent damage.

2. Pulsed, 2.5 % duty cycle of 4620 μs period, 50 Ω. Operation between operating maximum and absolute maximum for extended periods may reduce reliability.

25364.SPECeng / PAH-6G/95-TTL / 06 September 2018  
 Technical subject to change

Page 1 from 3  
 © MTS Systemtechnik GmbH



# Programmable Attenuator PAH-6G/95-TTL

MTS-No.: 25364

## Typical measurements:

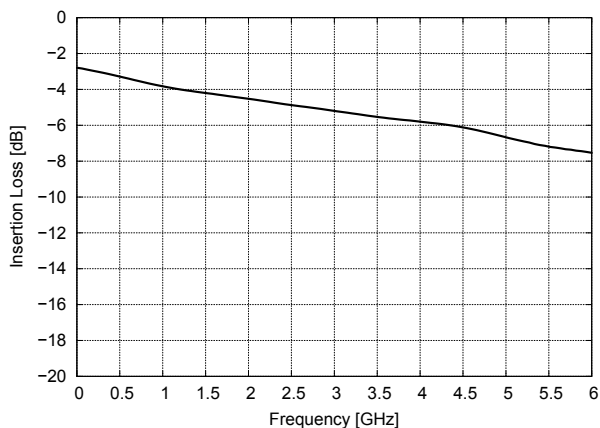


Fig. 1: Input port to output port insertion loss

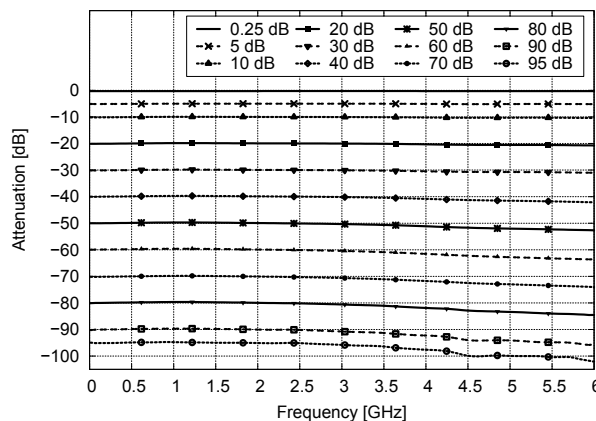


Fig. 2: Attenuation relative to insertion loss

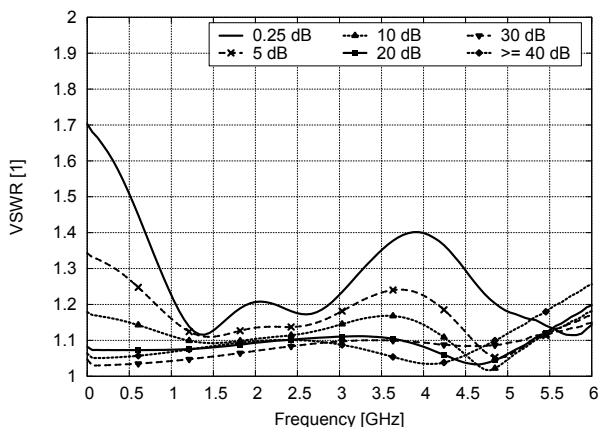


Fig. 3: VSWR for input and output ports

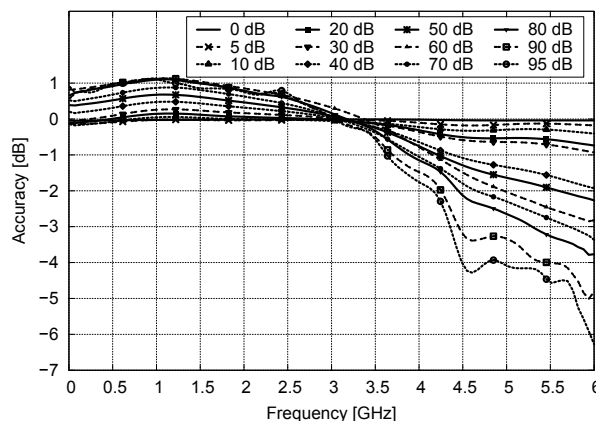


Fig. 4: Attenuation accuracy

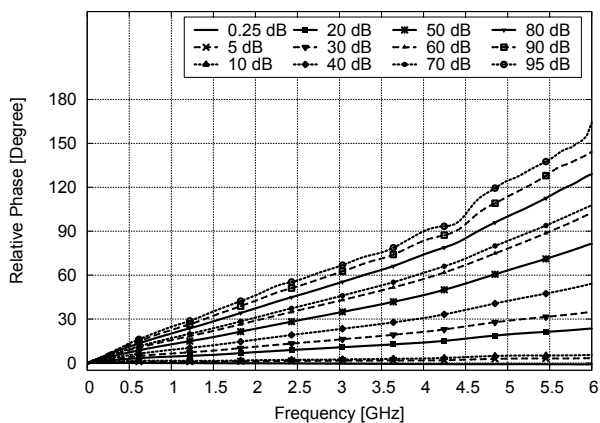


Fig. 5: Phase relative to insertion loss


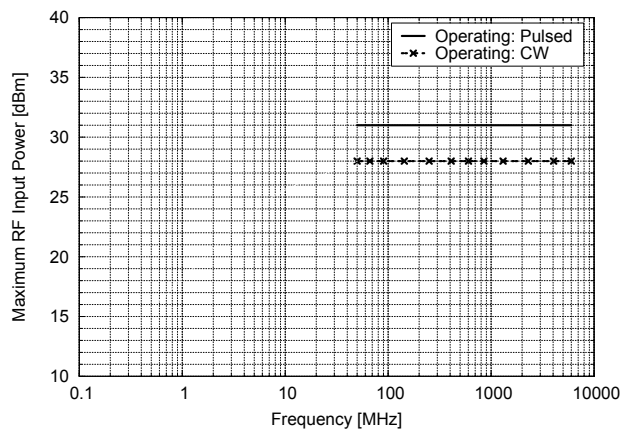







Fig. 6: Power derating curve

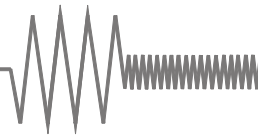

## Programmable Attenuator PAH-6G/95-TTL

MTS-No.: 25364

Views:

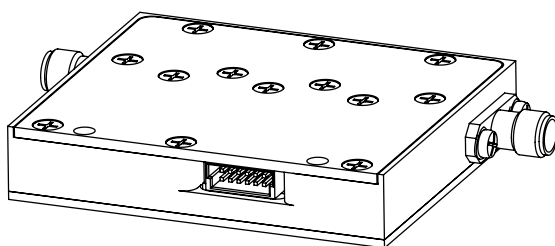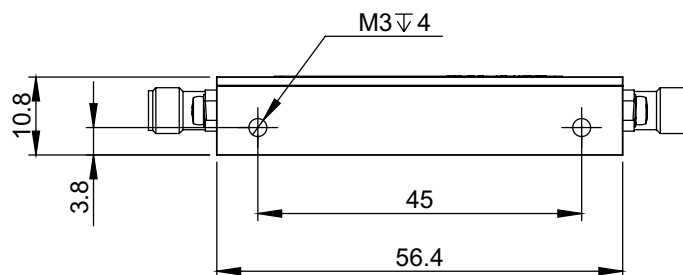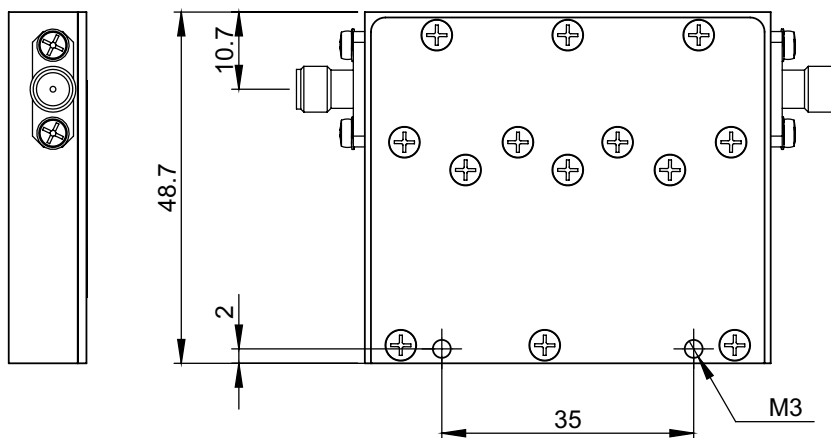

### Pin assignment

Pin	Grade	Pin	Grade
a1	D0 (0.5 dB)	b1	D1 (1dB)
a2	D2 (2 dB)	b2	D3 (4 dB)
a3	D4 (8 dB)	b3	D5 (16 dB)
a4	D6 (32 dB)	b4	D7 (0.25 / 31.5 dB)
a5	+5V	b5	+5V
a6	GND	b6	GND