

Power Divider LT2-544P-8G

MTS-No.: 30010

Description

The LT2-544P-8G is a ultra-wideband 2-way 0° high-power divider/combiner which provides up to 40 W power handling as a divider.

The coverage from 500 MHz to 8 GHz supports a wide range of applications including GSM, Bluetooth, Wi-Fi 7 and all LTE+ as well as 5G frequency bands.

Its unique design maintains a very low insertion loss, minimizing power dissipation and excellent signal power transmission from input to output.



Technical data:

1 RF-specifications:

1.1	Divider type	LT2, 2-way		
1.2	Impedance	50 Ω		
1.3	Input power (see table) @ common port @ output ports 1, 2	40 W max. @ VSWR ≤ 2.0 : 1 1 W max. each port		
1.4	Frequency range	500 - 8000 MHz		
1.5	VSWR in @ 700 - 8000 MHz @ 500 - 700 MHz	min.	typ.	max.
			1.10	1.30
			1.35	1.60
1.5	VSWR out @ 500 - 7200 MHz @ 7200 - 8000 MHz		1.05	1.25
			1.30	1.60
1.6	Insertion loss (+3 dB) @ 500 - 4000 MHz @ 4000 - 8000 MHz		0.25 dB	0.50 dB
			0.45 dB	0.70 dB
1.7	IL derating / 200 MHz	0.01 dB		
1.8	Isolation @ 700 - 7200 MHz @ 500 - 8000 MHz		20 dB	25 dB
			13 dB	18 dB
1.9	Amplitude balance @ 500 - 4000 MHz @ 4000 - 8000 MHz		0.05 dB	0.10 dB
			0.10 dB	0.20 dB
1.10	Phase balance @ 500 - 4000 MHz @ 4000 - 8000 MHz		0.5°	1.0°
			1.0°	2.0°

2 Connections:

2.1	RF-in- and outputs	3x SMA female (3x N female available @ MTS-No.: 30011)
-----	--------------------	--

3 General specifications:

3.1	Operating temperature	-40 °C - +85 °C
3.2	Reference temperature of specifications	+25 °C
3.3	Dimensions (without connections)	70 mm x 49 mm x 15 mm (LxWxH)
3.4	Case style	Milled aluminium enclosure
3.5	Colour	SurTec650 (Chrome alloy)
3.6	Weight	135 grams

4 Delivered parts:


LT2-544P-8G
Datasheet

5 Comments:

Warranty	12 months
RoHS-compliant	Yes

6 Recommended accessories:

RF-cables
Attenuators series PAH



Power Divider LT2-544P-8G

MTS-No.: 30010

Typical measurements:

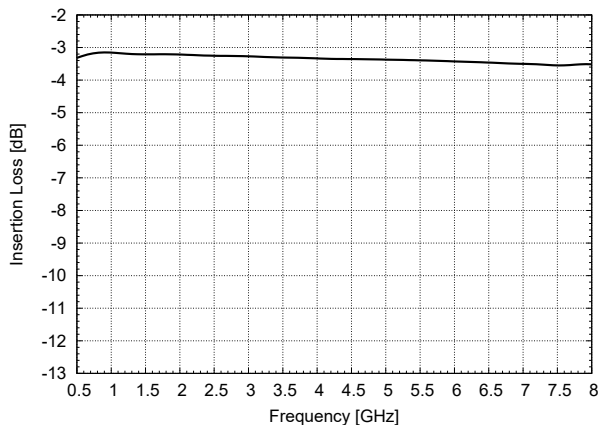


Fig. 1: Common port to output port insertion loss

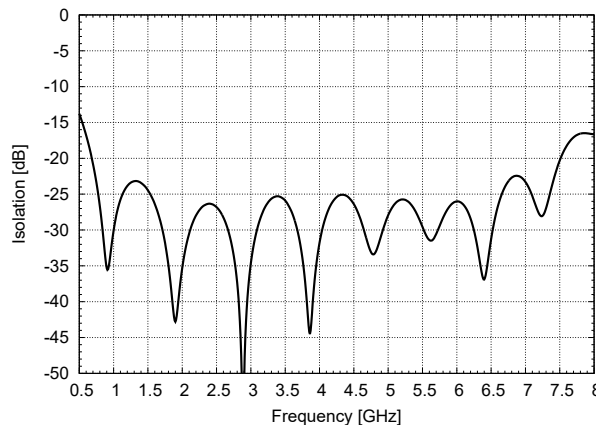


Fig. 2: Isolation between output ports

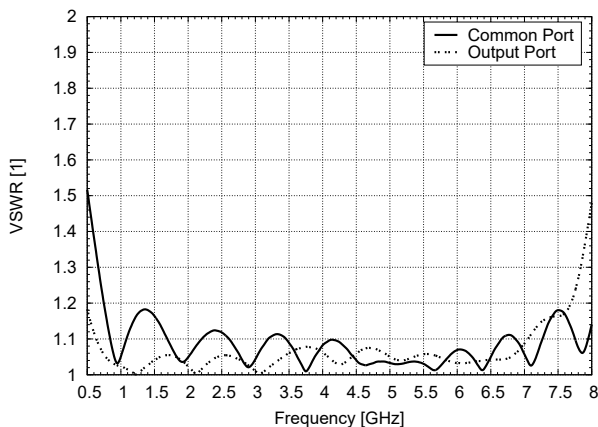


Fig. 3: VSWR for common and output ports

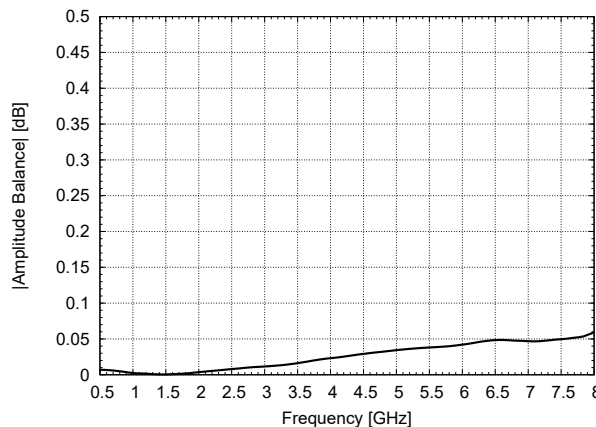


Fig. 4: Amplitude balance between output ports


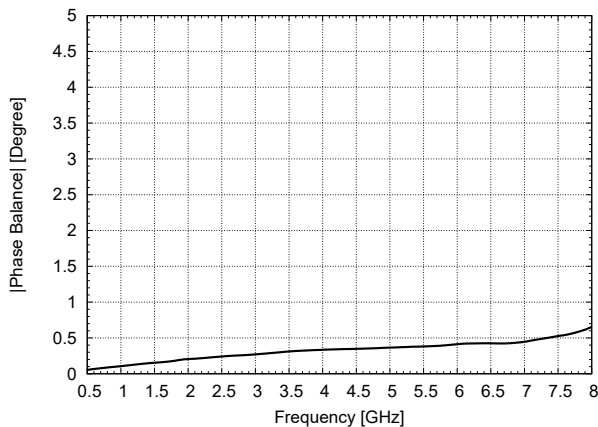


Fig. 5: Phase balance between output ports



Power Divider LT2-544P-8G

MTS-No.: 30010

Power ratings:

2-way Power Divider input ratings (common port)		
Load VSWR	In-phase (0°)	Out-of-phase (180°)
≤ 1.2 : 1	40 Watts	40 Watts
≤ 2.0 : 1	40 Watts	20 Watts
∞	20 Watts	2 Watts
2-way Power Combiner input ratings (output ports)		
Input signals	0° Phase Difference	180° Phase Difference
Coherent	2 x 20 Watts	2 x 1 Watt
Non-coherent	2 x 2 Watts	

Views:

